

Tube EO

Tested by TÜVRheinland®
Precisely Right.

REGISTERED DESIGN **R**



Ingombri minimi

NUMERO BRACCI

| | 2 BRACCI | 3 BRACCI | 4 BRACCI | 6 BRACCI |
|---------------------------------|----------|----------|----------|----------|
| SPORGENZA BRACCIO 165 | 173 | 271 | 355 | 532 |
| 215 | 223 | 346 | 455 | 682 |
| 265 | 273 | 421 | 555 | 832 |
| 315 | 323 | 496 | 655 | 982 |

Numero staffe

LARGHEZZA TENDA

| 240 | 241-300 | 301-360 | 361-410 | 411-480 | 481-540 | 541-600* | 601-700 * | 701-800 * | 801-900 ** | 901-1100 ** | 1101-1400 *** |
|----------|---------|---------|---------|---------|---------|----------|-----------|-----------|------------|-------------|---------------|
| 2 BRACCI | | | | | | | 3 BRACCI | | | 4 BRACCI | |

NUMERO STAFFE


| | | | | | | | | | | | | |
|---------------------------------|---|---|---|---|---|---|---|---|---|---|---|---|
| SPORGENZA BRACCIO 165 | 2 | 2 | 2 | 3 | 3 | 3 | 4 | 5 | 5 | 7 | 7 | 8 |
| 215 | 2 | 2 | 2 | 3 | 3 | 3 | 4 | 5 | 5 | 7 | 7 | 8 |
| 265 | - | 2 | 2 | 3 | 3 | 3 | 4 | 5 | 5 | 7 | 7 | 8 |
| 315 | - | - | 2 | 3 | 3 | 3 | 4 | 5 | 5 | 7 | 7 | 9 |

* 1 supporto compensatore


**2 supporti compensatore

***3 supporti compensatore


Dimensioni di ingombro PIUMA**
installazione a parete o soffitto

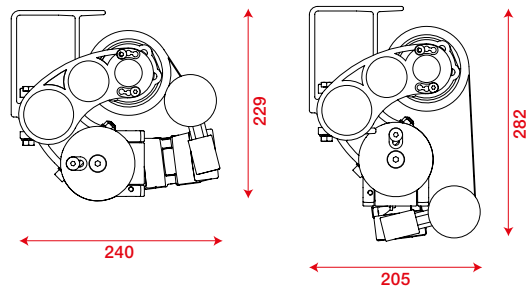

Dimensioni staffa**
installazione a parete o soffitto

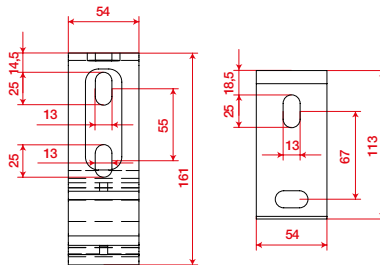

Lunghezza del braccio e inclinazione
installazione a parete o a soffitto

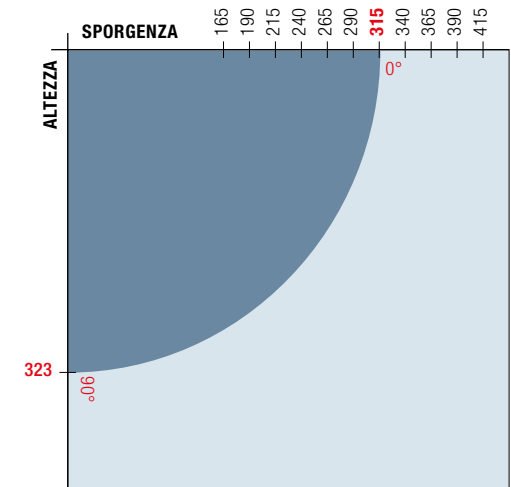

Caratteristiche tecniche



Le misure sono espresse in centimetri

** Le misure sono espresse in millimetri